



884 T

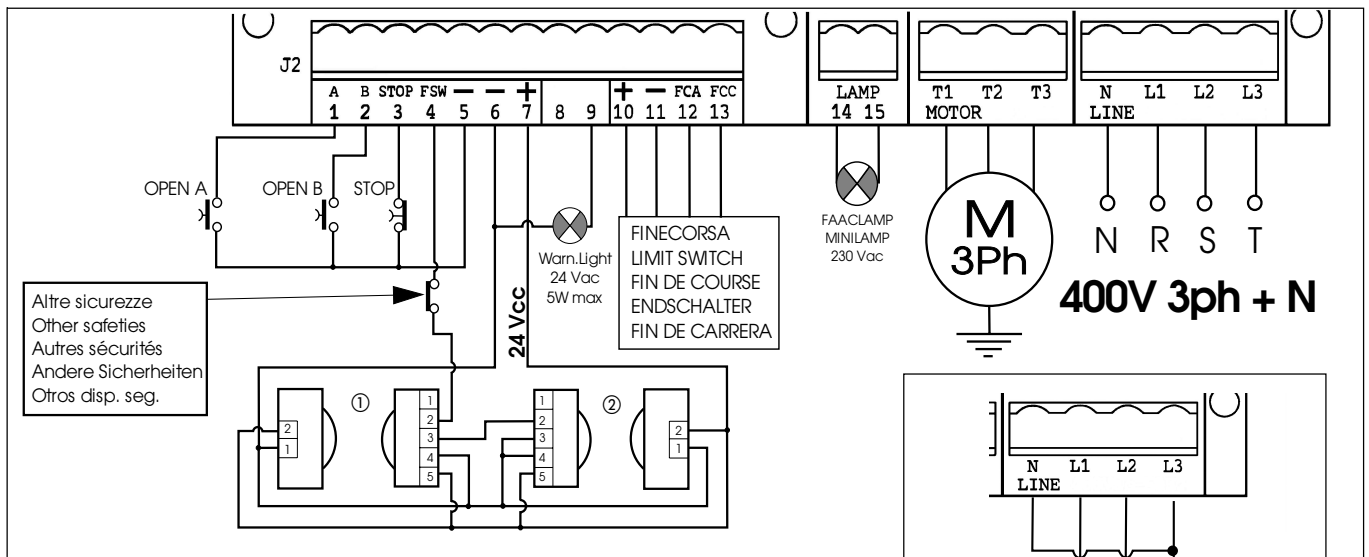

Logica Logic Logique Logik Lógica	SW1	SW2	SW3
E1	ON	ON	ON
B	OFF	ON	ON
S2	ON	OFF	ON
E2	OFF	OFF	ON
A1	ON	ON	OFF
C	OFF	ON	OFF
S1	ON	OFF	OFF
A2	OFF	OFF	OFF

Tempo pausa (sec.) Pause time (sec.) Temporisation (s) Pausenzeit (s) Tiempo de pausa (seg.)	Logica/Logic	A1	A2	S2	S1	SW4	SW5
5	ON	ON	ON	ON	ON	ON	ON
10	OFF	ON	ON	ON	ON	OFF	ON
30	ON	ON	ON	ON	ON	ON	OFF
120	OFF	ON	ON	ON	ON	OFF	OFF



Prelampeggio Pre-flashing Préclignotement Vorblinken Predestello	SW7
Sì - Yes - Oui - Ja - Sí	ON
No - Non - Nein - No	OFF

Funzionamento lampada spia Operation of Warning light Fonctionnement lampe témoin Betrieb Kontrollampe Funcionamiento lámpara indicadora			
Stato del cancello - Gate status - État du portail - Torzustand - Estado de la cancela			
SW6	In chiusura Closing En fermeture Beim Schliessen En cierre	In Apertura/Aperto Opening/Open En Ouverture/Ouvert Beim öffnen/Geöffnet En Apertura/Abierta	Chiuso Closed Fermé Geschlossen Cerrado
	Accesa - Light on - Allumée - Dauerlicht - Luz fija	Accesa - Light on - Allumée - Dauerlicht - Luz fija	Spenta Light off Éteinte Erlöschen Apagada
ON	Lampeggiante - Flashing - Clignotante - Blinken - Intermitente		
OFF			

Alimentazione	400V 3ph+N / 230 3ph (+6 -10 %) 50Hz
Carico max motori	1,3 kW
Alimentazione accessori	24Vdc
Carico max accessori	500 mA
Temperatura ambiente	- 20°C + 55°C
Temporizzazione di sicurezza	255 sec.

Power supply	400V 3ph+N / 230 3ph (+6 -10 %) 50Hz
Motor max. load	1,3 kW
Accessories power supply	24Vdc
Accessories max. load	500 mA
Temperature range	- 20°C + 55°C
Safety timing	255 sec.

Alimentation	400V 3ph+N / 230 3ph (+6 -10 %) 50Hz
Puissance maxi moteur	1,3 kW
Alimentation accessoires	24Vcc
Puissance maxi accessoires	500 mA
Température d'utilisation	- 20°C + 55°C
Temporisation de sécurité	255 s

Versorgungsspannung	400V 3ph+N / 230 3ph (+6 -10 %) 50Hz
Max. Motorbelastung	1,3 kW
Zubehörversorgung	24V GS
Max. Zubehörbelastung	500 mA
Außentemperatur	- 20°C + 55°C
Sicherheitsaktung	255 s

Alimentación	400V 3ph+N / 230 3ph (+6 -10 %) 50Hz
Carga máxima motores	1,3 kW
Alimentación accesorios	24Vcc
Carga máxima accesorios	500 mA
Temperatura ambiente	- 20°C + 55°C
Temporización de seguridad	255 seg.